OPERATING INSTRUCTIONS

1209B AND 1209C

TYPE [redacted] 1209B

UNIT OSCILLATOR

RETURN TO
INSTRUMENT
STANDARDS -- West
1209C

. . . SINCE 1915
manufacturers of
electronic apparatus
for science and industry

MP MASTER
MA33095

GENERAL RADIO COMPANY
CAMBRIDGE 39, MASSACHUSETTS, USA

SPECIFICATIONS

Frequency Range: Type 1209-BL: 180 to 600 Mc
Type 1209-B: 250 to 920 Mc

Frequency Calibration Accuracy: ±1 percent.

Frequency Control: 0.5 to 50 Mc in two ranges.

Output System: Short coaxial line with adjustable coupling loop at one end and coaxial connector on the other. Maximum power can be delivered to load impedances normally met in coaxial systems.

Output Power: Type 1209-B: At least 200 mw into 50-ohm load at any frequency within range. Refer to curve below.
Type 1209-BL: At least 300 mw into 50-ohm load at any frequency within range. Refer to curve below.

Modulation: Plate modulation of 30% at audio frequencies can be produced by external source of 40 volts. Input impedance is about 8000 ohms. Type 1000-P6 Crystal Diode Modulator and Type 1000-P7 Balanced Modulator are recommended to avoid incidental fm. Refer to Table on page 3.

Tuned Circuit: Butterfly, with no sliding contacts.

Power Supply Requirements: 330 v at 36 ma dc
6.3 v at 0.4 amp

Power Supply Recommended: Refer to Table of Accessories, page 3.

Oscillator Tubes: Sylvania Type RT434.

Mounting: Aluminum casting surrounded by spun-aluminum shield. Assembly is mounted on L-shaped panel-and-chassis piece.

Accessories Supplied: Type 874-R22 Cable, Type 874-C58 Cable Connector, Jones socket, and telephone plug.

Accessories Available: Refer to Table on page 3.

Dimensions: Height 6¼ in., width 9¼ in., depth 7 in., over-all.

Weight: 6¾ lb.

GENERAL RADIO EXPERIMENTER references: Vol 24 No. 12, May, 1950
Vol 29 No. 11, April, 1955
Vol 32 No. 8, January, 1958

U. S. Patent No. 2,548,457

SPECIFICATIONS

FREQUENCY RANGE: 0.5 to 50 Mc in two ranges.

FREQUENCY CALIBRATION ACCURACY: ±2 percent.

FREQUENCY CONTROL: A four-inch dial with calibration over 270 degrees, with a slow-motion drive of 4½ turns.

FREQUENCY CONTROLS: A two-position range switch, a six-inch dial with calibration approximately logarithmic vs angular rotation, and a slow-motion dial for indicating frequency increments of 0.2 percent per dial division.

OUTPUT SYSTEM: Output available at a coaxial connector at rear of instrument. Adjacent ground terminal also provided. Output is adjustable by means of a control knob mounted on front panel and calibrated in arbitrary units.

OUTPUT POWER: Type 1209-B: At least 200 mw into 50-ohm load at any frequency within range. Refer to curve below.
Type 1209-BL: At least 300 mw into 50-ohm load at any frequency within range. Refer to curve below.

MODULATION: Direct amplitude modulation over the audio frequency range can be obtained with an external audio oscillator. Impedance of the modulation jack is about 8000 ohms, and 25-percent modulation is obtained with about 45 volts. Under these conditions, envelope distortion is in the order of three percent, and is a function of carrier-frequency setting. The audio source must be capable of carrying the 35-ma load current of the series modulator. For amplitude modulation free from incidental fm, a Type 1000-P6 Crystal Diode Modulator can be used at carrier frequencies above 10 Mc.

CIRCUIT: Hartley oscillator coupled directly to output. Tuning capacitance and core position are simultaneously changed for frequency tuning.

POWER SUPPLY REQUIRED: 300 volts at 50 ma dc.
6.0 volts at 0.75 amperes ac or dc.

POWER SUPPLY RECOMMENDED:

Standard voltage	Type 1203-A Unit Power Supply	115-v, 50-60-cps line
Constant output level vs frequency	Type 1209-A Amplitude-Regulating Power Supply with Type 874-VR Voltmeter Rectifier, Type 874-Q6 Adaptor, and Type 874-MP1 Patch Cord.	105-125 v/210-250 v, 50-60-cps line
Adjustable plate voltage	Type 1204-B Unit Variable Power Supply	115-v, 60-cps line
Battery operation	Type 1202-A Unit Vibrator Power Supply	6-or 12-v battery or 115-v 50-60-cps line

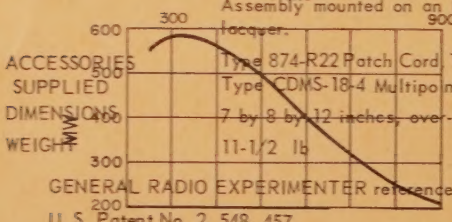

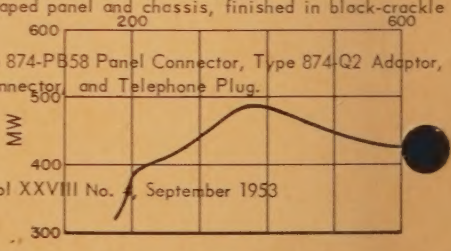

TUBE: Type 2C48 miniature vhf beam-power amplifier (supplied).

MOUNTING: Oscillator mounted on aluminum casting and shielded with a spun aluminum cover. Assembly mounted on an L-shaped panel and chassis, finished in black-crackle lacquer.

ACCESSORIES SUPPLIED: Type 874-R22 Patch Cord, Type 874-PB58 Panel Connector, Type 874-Q2 Adaptor, Type CDMS-18-4 Multipoint Connector, and Telephone Plug.

DIMENSIONS: 7 by 8 by 12 inches, over-all.

WEIGHT: 11-1/2 lb

GENERAL RADIO EXPERIMENTER reference: Vol XXVIII No. 4, September 1953

U. S. Patent No. 2, 548, 457

Output Characteristic of Types 1209-B (left) and 1209-BL (right) Unit Oscillators. (Although output characteristics of individual oscillators will vary, outputs will generally equal or exceed those shown.)

SPARE MANU

OPERATING INSTRUCTIONS

TYPES 1209-B AND 1209-BL UNIT OSCILLATORS

Form 732-H
March, 1958

GENERAL RADIO COMPANY

CAMBRIDGE 39 MASSACHUSETTS

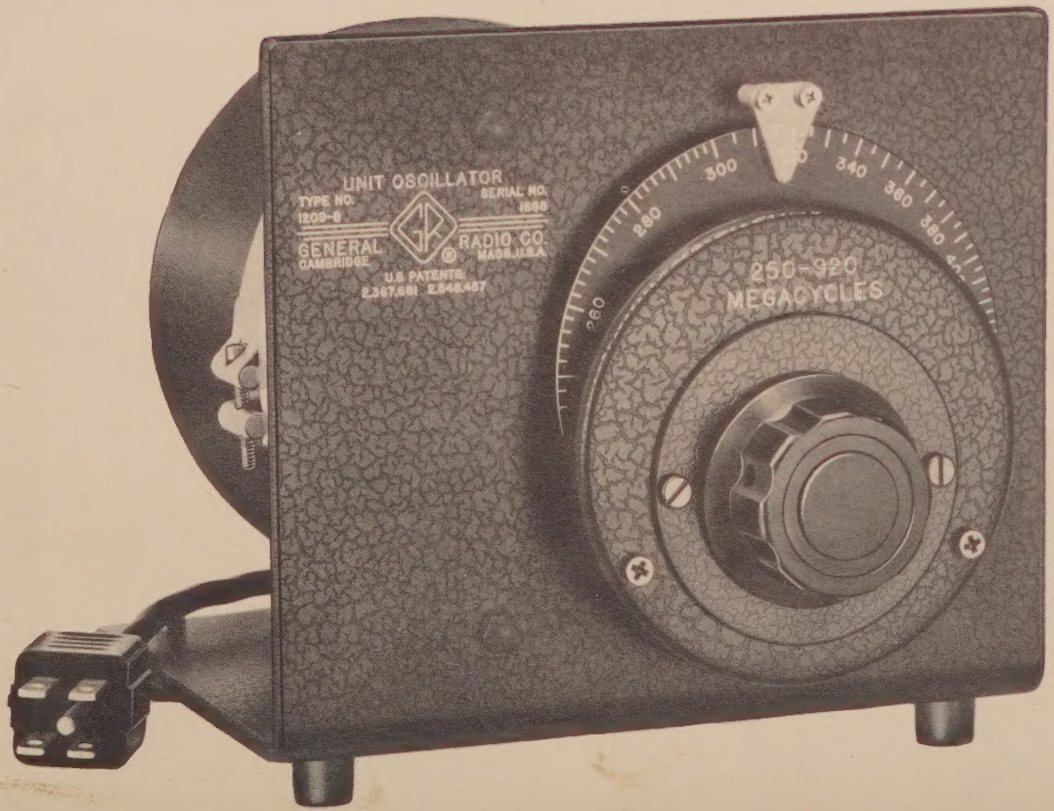

Figure 1. Type 1209-B Unit Oscillator
(Type 1209-BL identical in appearance except for dial calibration).

TYPES 1209-B AND 1209-BL UNIT OSCILLATORS

Section 1
INTRODUCTION

1.1 PURPOSE. The Types 1209-B and 1209-BL Unit Oscillators (Figure 1) are general-purpose radio-frequency power sources covering the ranges of 250 to 920 Mc and 180 to 600 Mc, respectively. These members of the convenient Unit Instrument line can be used to drive bridges, slotted lines, impedance comparators, and other measuring equipment. Used with a voltmeter and attenuator, they provide accurately known output voltages for the testing of receivers. Direct amplitude modulation is possible over the audio-frequency range, and amplitude modulation free from incidental fm can be obtained with a simple crystal-diode modulator from zero to 5 Mc. Connected to a mixer, the Unit Oscillator can be used as the local oscillator in a heterodyne receiver to convert the Type 1216-A Unit I-F Amplifier on a low-frequency communications receiver into a vhf or uhf detector. Pulsing and linear 100-percent amplitude modulation can be obtained with an external balanced modulator.

With the exception of frequency and output-characteristic differences stated in the Specifications, the Types 1209-B and 1209-BL are identical to each other, and all information contained herein applies to both.

1.2 DESCRIPTION. The tuning system of the Type 1209-B Unit Oscillator is a "butterfly" circuit, which combines a variable air capacitor and a variable inductor in a single unit with no sliding contacts. Inductance varies from 0.012 μh at the low-frequency end to 0.004 μh at the high-frequency end, and capacitance varies from 40 μμf to 7 μμf. The vernier dial requires about 4-1/2 turns to rotate the main dial over its full 270 degrees. The rotor of the tuning unit is geared down for 80-degree rotation. The frequency calibration is accurate within 1 percent.

Plate and grid of the oscillator tube are connected to the tuned circuit, and the cathode is left floating. The oscillator circuit is of the Colpitts type, with feedback determined essentially by the electrode capacitances of the tube. A small amount of cathode-plate capacitance has been added.

The output system is a short coaxial line, with a coupling loop on one end and a Type 874 Coaxial Connector on the other. Coupling between the loop and the oscillator can be adjusted over a wide range, and the loop can be clamped in the desired position. Maximum power can be delivered to load impedances normally encountered in coaxial systems.

1.3 ACCESSORIES.

1.3.1 AMPLITUDE MODULATION. A simple audio oscillator can be connected in the plate circuit of the unit oscillator to give amplitude modulation over the audio-frequency range. The audio oscillator circuit must supply a d-c path and must be able to carry 30 milliamperes dc.

Plate modulation of the oscillator introduces some incidental frequency modulation. Incidental fm is considerably reduced if square-wave or pulse modulation is used instead of sinusoidal amplitude modulation, but the power required is large and the accessories are more complex and more expensive.

Amplitude modulation free from incidental fm can be obtained by means of a Type 1000-P6 Crystal Diode Modulator or Type 1000-P7 Balanced Modulator connected between oscillator and load.

1.3.2 SWEEP AND DIAL DRIVES. The frequency dial of the Type 1209-B Unit Oscillator can be mechanically swept back and forth by the Type 1750-A Sweep Drive, the Type 908-P Synchronous Dial Drive, or the Type 907-R Dial Drive.

The Sweep Drive can be coupled either to the slow-motion dial or to the main frequency dial of the Unit Oscillator. When the main frequency dial is coupled to the Sweep Drive, the sweep rate should be restricted to one excursion per second or less. The slow-motion dial can be driven at rates up to 5 cycles per second. The magnitude and center position of the sweep arc, as well as the sweep rate, can be set by controls on the Sweep Drive panel. The Sweep Drive also provides horizontal deflection voltage, proportional to shaft rotation, for an oscilloscope. The combination of a Type 1209-B Unit Oscillator, Sweep or Dial Drive, and Type 1263-A Amplitude-Regulating Power Supply is a versatile sweep generator for recording or oscilloscopic display of frequency characteristics.

When the Type 1209-B Unit Oscillator is driven by a sweep or dial drive, all moving parts in the oscillator must be lubricated in accordance with paragraph 4.4.

1.3.3 OTHER ACCESSORIES. Supplied with the Unit Oscillator are a 874-R22 three-foot coaxial double-shielded Patch Cord, a Type 874-P Panel Connector, a Type 874-C Cable Connector, a Jones socket, and a phone plug.

TABLE OF ACCESSORIES

Accessory and Function	Instrument	Remarks
POWER SUPPLIES		
Standard	Type 1203-B Unit Power Supply	115-v, 50-60-cps line
Stabilized Plate Voltage	Type 1201-A Unit Regulated Power Supply	105-125-v, 50-60-cps line
Battery Operation	Type 1202-A Unit Vibrator Power Supply	6- or 12-v battery or 115-v, 50-60-cps line
Adjustable Plate Voltage	Type 1204-B Unit Variable Power Supply	115-v, 60-cps line
Constant Output Level vs Frequency	Type 1263-A Amplitude Regulating Power Supply with Type 874-VR Voltmeter Rectifier, Type 874-Q6 Adaptor, and Type 274-NF Patch Cord	115- or 230-v, 50-60-cps line
MODULATORS		
Plate Modulation	Type 1214-A Unit Oscillator	400 and 1000 cps output, 115-v, 40-60-cps line
Square-Wave or Pulse Modulation	Type 1219-A Unit Pulse Amplifier	Requires modulation source.
Absorption Modulation with no Incidental Fm	Type 1000-P6 Crystal-Diode Modulator	Requires modulation source. Modulation freq range 0-5 Mc. Maximum output 10 mv.
Balanced Modulation for linear 100-percent amplitude modulation and for pulses with high degree of carrier suppression	Type 1000-P7 Balanced Modulator	Requires modulation source. Modulation frequency range 0-20 Mc.
SWEEP DRIVE		
Automatic Frequency Sweep	Type 1750-A Sweep Drive Type 908-P Synchronous Dial Drive Type 907-R Dial Drive	Type 1263-A Amplitude-Regulating Power Supply recommended to keep oscillator output level constant.
RELAY RACK PANEL	Type 480-P4UC2	For Types 1203-B and 1209-B or for 1201-A and 1209-B
ADAPTORS - available for connecting Type 874 coaxial output terminals to Types N, BNC, C, UHF, and HN coaxial systems.		

Section 2
OPERATING PROCEDURE

2.1 INSTALLATION. The Type 1209-B Unit Oscillator is shipped complete with tube installed, and when connected to a suitable power supply is ready for use. A cord and connector are supplied with the instrument for direct connection to a General Radio Unit Power Supply. Connect the oscillator to the equipment under test by means of the three-foot coaxial cable supplied. If necessary, install one of the two connectors supplied on the equipment under test; or use one of the many adaptors available for various coaxial systems.

If a power supply other than a Unit Power Supply is used, it should be capable of supplying 330 volts at 36 milliamperes and 6.3 volts at 0.4 ampere. To reduce these requirements, the series and shunt resistors in the base of the oscillator could be disconnected, but care must be taken not to overload the tube under various operating conditions. Plate dissipation of the oscillator tube should be limited to 5 watts, and best operation will be obtained with a plate current of 30 milliamperes at 165 volts.

2.2 OPERATION. After turning on the power supply, adjust the frequency by means of the frequency dial, and adjust the output by rotating the output coupling loop. For low output the coupling loop can be partly withdrawn.

For plate modulation the audio modulating voltage should be inserted at the jack at the side of the base. Full plate current must flow through the modulating source. A modulating voltage of about 40 volts is required for 30-percent modulation. The input impedance is about 8000 ohms.

2.3 FREQUENCY DEVIATION. For some applications a well-regulated and filtered power supply should be used to avoid frequency variations caused by line-voltage fluctuation and to produce a clearer beat note at the highest frequencies. With an unregulated power supply, a line-voltage variation of 20 percent causes a frequency change of about 0.01 percent at frequencies up to 600 Mc, and a frequency change of about 0.05 percent at the top end of the frequency range.

As mentioned above, amplitude modulation over the audio range can be obtained by an audio-frequency voltage superimposed in the d-c power supply. Incidental fm, inherent in this system, is about 0.01 percent for 50-percent amplitude modulation at carrier frequencies up to 400 Mc, and 0.1 percent at the high-frequency end.

2.4 SQUARE-WAVE AND PULSE MODULATION. The rise time of the Type 1209-B Unit Oscillator depends on frequency and load conditions, and is never adequate to reproduce short pulses faithfully. However, modulation with square waves and long pulses might be desirable for applications where incidental fm has to be kept to a minimum.

For best results, the plate power supply should be disconnected. Then ground the junction of inductors L1 and L2 in the r-f compartment and introduce square waves or pulses at the modulation jack. With 150 volts at 20 to 30 ma, either pulses or square waves, output will be the same as that obtainable with a Unit Power Supply. A Type 1219-A Unit Pulse Amplifier driven by a Type 1210-B Unit R-C Oscillator for square waves or by a Type 1217-A Unit Pulser would be suitable for this purpose.

Section 3
APPLICATIONS

3.1 GENERAL. The utility and versatility of the Type 1209-B Unit Oscillator are greatly increased by the large selection of Type 874 coaxial elements, available from General Radio Company. These elements are part of a complete, integrated line of equipment for the measurement of voltage, power, and standing-wave ratio at very-high and ultra-high frequencies. Although the Unit Oscillator is intended primarily as a source of power for this measuring equipment and for other impedance-measuring devices such as the Type 1602-A U-H-F Admittance Meter, use of the coaxial elements can adapt the Unit Oscillator to various applications in the radio-frequency laboratory in place of more expensive equipment that is not always available. The tuning circuit of the Type 1209-B Unit Oscillator uses ball bearings, and thus can be motor-driven, for sweep applications, by sweep and dial drives (refer to paragraph 1.3.2).

Three applications are described in detail in the following paragraphs. Others will be suggested by a study of the complete list of Type 874 Coaxial elements, included in the General Radio Catalog.

3.2 UNIT OSCILLATOR AS SIGNAL GENERATOR FOR RECEIVER TESTING. The Type 1209-B Unit Oscillator, as a well-shielded power source, can be used as a signal generator to test receivers if means are available to measure and attenuate the output. The Type 874-VR Voltmeter Rectifier, Type 874-VI Voltmeter Indicator, and Type 874-GA Adjustable Attenuator are suitable for this purpose, and should be connected to the Unit Oscillator as shown in Figure 2. Also, a Type 874-D50 Adjustable Stub is required to produce a current maximum at that point of the attenuator where the adjustable output loop is coupled. A tuning

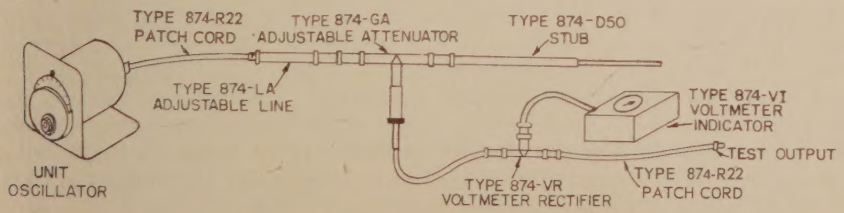

Figure 2. Setup of Unit Oscillator and Accessories for Use as Standard-Signal Generator.

element between the oscillator and the attenuator is required to increase the output to a value that can be read on the voltmeter. At higher frequencies coverage is obtained by a Type 874-LA Adjustable Line. At lower frequencies additional lengths of line must be used.

Current from the Unit Oscillator is fed through the attenuator into the short circuit at the stub. The attenuator is calibrated in decibels. At minimum attenuation the attenuator output is measured by a crystal diode in the voltmeter rectifier and read on the meter of the voltmeter indicator. Means are provided to standardize the crystal indication. A 50-ohm resistor after the crystal determines the output impedance.

With the above-described arrangement, the maximum available output is several tenths of a volt. The attenuator calibration covers 120 db, but shielding of the Unit Oscillator and of other components is not sufficient for accurate measurements in the microvolt region.

3.3 UNIT OSCILLATOR AS A TELEVISION SIGNAL GENERATOR. Used in combination with a Type 1000-P6 Crystal Diode Modulator and a Type 874-G20 20-db Fixed Attenuator, the Unit Oscillator is a convenient source of television signals over its entire carrier-frequency range if video modulating voltage is available. (See Figure 3.) The modulating voltage required can be obtained from a standard television receiver tuned to the local channel.

Since the modulator and oscillator are separated from each other by an attenuator pad, amplitude modulation is free from incidental fm. Output is about 10 millivolts.

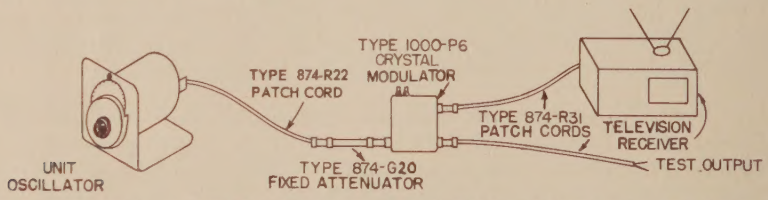

Figure 3. Setup of Unit Oscillator with Video Modulator for Use as Television Signal Generator.

3.4 UNIT OSCILLATOR AS A FREQUENCY CONVERTER. Connected to a Type 874-MR Mixer Rectifier, the Unit Oscillator can provide the local signal in a heterodyne converter to adapt the Type 1216-A Unit I-F Amplifier for use as a sensitive detector for v-h-f and u-h-f signals. (See Figure 4.) Without additional tuning, the conversion loss is about 6 db at an intermediate frequency of 30 Mc. The Type 1216-A I-F Amplifier has a built-in precision attenuator and a panel meter. Its bandwidth is 0.7 Mc and it has excellent sensitivity. Provision is made for the measurement of the rectified mixer current in the i-f amplifier, and a separate built-in power supply is available for operating the Unit Oscillator.

For the vhf range of 50-250 Mc, the Type 1215-B Unit Oscillator is an excellent companion instrument to the Type 1209-B. The two oscillators are similar in appearance and construction.



Figure 4. Setup of Unit Oscillator and Mixer Rectifier for Use as Frequency Converter.



Figure 5. Installation Detail of Oscillator Tube.

Section 4
SERVICE AND MAINTENANCE

4.1 GENERAL. This service information should enable the user to locate and correct ordinary difficulties resulting from normal use. Major problems should be referred to our Service Department, which will cooperate as much as possible by furnishing information and instructions, as well as by supplying any replacement parts needed. When notifying our Service Department of any difficulties in operation or service, specify the serial and type numbers of the instrument. Also report the trouble encountered and steps taken to eliminate the trouble.

Before returning an instrument or part for repair, please write to our Service Department, requesting a Returned Material Tag, which includes shipping instructions. Use of this tag will insure proper handling and identification. A purchase order covering repair of material returned should also be forwarded to avoid unnecessary delay.

4.2 INSTALLATION OF OSCILLATOR TUBE. When it is necessary to replace the Type RT-434 oscillator tube, install the new tube as follows (see Figure 5):

a. Remove the screw holding the plate clamp.

b. Loosen the grid clamp screw until the tube can be slid into position. Place the cathode connection just short of the filament clip.

c. Carefully tighten the grid clamp, holding it in place on the tube firmly.

d. Replace the plate screw and carefully tighten the plate clamp.

CAUTION

Be careful when tightening clamps. Glass seals are fragile.

e. Restore frequency calibration, if necessary, in accordance with paragraph 4.3.

4.3 FREQUENCY CALIBRATION. Replacement of the oscillator tube may affect frequency calibration. It can be restored by adjustment of the flexible tab on the plate connector. Before adjusting this trimmer capacitor, allow the instrument to warm up, since warm-up drift may be as much as 0.2 percent. The oscillator shield affects frequency considerably, especially at the low-frequency end.

4.4 LUBRICATION. When the Type 1209-B Unit Oscillator is driven by a sweep or dial drive, all moving parts must be properly lubricated. Proper lubrication includes an occasional drop of light oil at the ball bearings, and occasional relubrication of the pinion gear in the dial assembly.

Section 5
PARTS LIST

REF DESIG	DESCRIPTION	PART NO.
C1	CAPACITOR, Fixed mica, 200 μμf ±10%	COU-24
C2	CAPACITOR, Fixed mica, 200 μμf ±10%, 500 dcwv	COU-8-2
C3A	CAPACITANCE, Built-in air adjustment	
C3B	CAPACITANCE, Built-in air adjustment	
C4	CAPACITOR, Fixed mica, 500 μμf ±10%	COU-24
C5	CAPACITOR, Fixed mica, 500 μμf ±10%, 500 dcwv	COU-8-2
C6	CAPACITANCE, Built-in air adjustment	
C7	CAPACITOR, Fixed mica, 100 μμf, built-in	
C8	CAPACITOR, Fixed mica, 500 μμf ±10%, 500 dcwv	COU-8-2
C9	CAPACITOR, Fixed mica, 500 μμf ±10%	COU-24
C10	CAPACITOR, Fixed electrolytic, 20 μf +100% -10%, 450 dcwv	COE-5
J1	JACK	CDSJ-10
L1	INDUCTOR, 45 μh	ZCHA-9
L2	INDUCTOR, 45 μh	ZCHA-9
L4	INDUCTOR, 20 μh	ZCHA-29
L6	INDUCTOR, 45 μh	ZCHA-9
L7	INDUCTOR (R-F pickup loop)	874-403
L8	INDUCTOR, 20 μh	ZCHA-29
LC1	BUTTERFLY	
LR1	HEATER FILTER	1021-216
PL1	PLUG	1209-34
R1	RESISTOR, Fixed, wire-wound, 560Ω ±10%, 2 w	REW-6C
R4	RESISTOR, Fixed composition, 1 k ±10%, 1/2 w	REC-20BF
R5	RESISTOR, Fixed power, 4.7 k ±10%, 10 w	REPO-22
R6	RESISTOR, Fixed composition, 21.5 k ±10% (two 43-k ±5% resistors in parallel), 2 w	REC-41BF

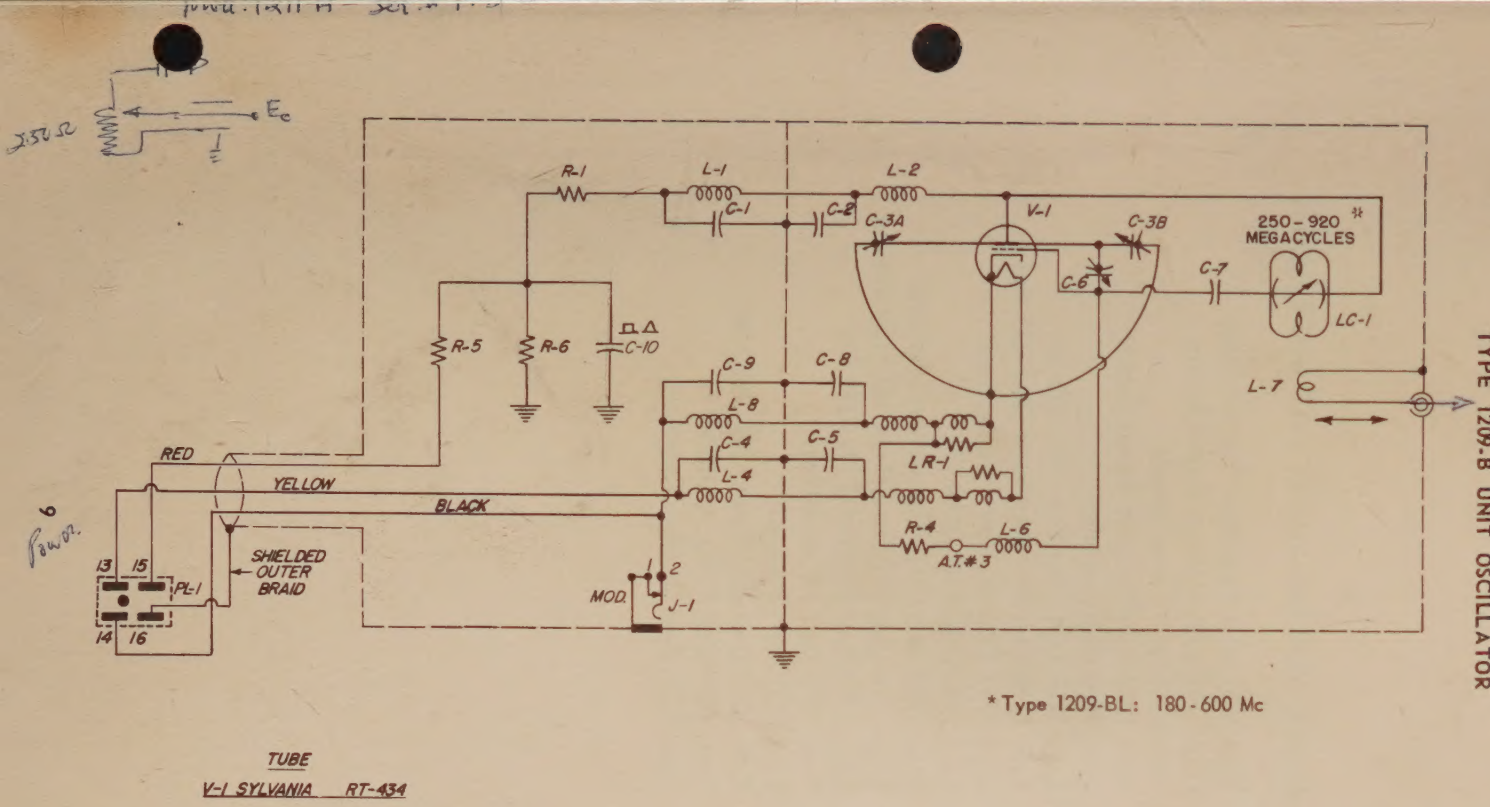

Figure 6. Schematic Diagram of Type 1209-B Unit Oscillator.

OTHER GENERAL RADIO UNIT INSTRUMENTS

Type 1201 Unit Regulated Power Supply
Type 1202 Unit Vibrator Power Supply
Type 1203 Unit Power Supply
Type 1204 Unit Variable Power Supply
Type 1206 Unit Amplifier
Type 1208 Unit Oscillator (65 - 500 Mc)
Type 1210 Unit R-C Oscillator (20 c - 0.5 Mc)
Type 1211 Unit Oscillator (0.5 - 50 Mc)
Type 1212 Unit Null Detector
Type 1213 Unit Time/Frequency Calibrator
Type 1214 Unit Oscillator (400 and 1000 cycles)
Type 1215 Unit Oscillator (50 - 250 Mc)
Type 1216 Unit I-F Amplifier
Type 1217 Unit Pulser
Type 1218 Unit Oscillator (900 - 2000 Mc)
Type 1219 Unit Pulse Amplifier
Type 1220 Unit Klystron Oscillator

GENERAL

370 MADISON AVENUE

Throughout U.S.A.

DISTRICT OFF

NEW YORK

MINNEAPOLIS

WASHINGTON

CHICAGO

Telephone Wabash 9-6200

LOS ANGELES

1000 N. Seward St., Los Angeles

Telephone HOllywood 9-6201

SAN FRANCISCO

1182 Los Altos Ave., Los Altos

Telephone Whitecliff 6-2233

CANADA

99 Floral Pkwy., Toronto 12, O

Telephone Cherry 6-2171

GENERAL RADIO COMPANY

275 MASSACHUSETTS AVENUE, CAMBRIDGE 39, MASS.

TRowbridge 6-4400

DISTRICT OFFICES

NEW YORK

Broad Ave. at Linden, Ridgefield, N. J.

Telephone N.Y. WOrth 4-2722
N.J. WHitney 3-3140

PHILADELPHIA

1150 York Rd., Abington, Penna.

Telephone HAncock 4-7419

WASHINGTON

8055 13th St., Silver Spring, Md.

Telephone JUniper 5-1088

CHICAGO

6605 West North Ave., Oak Park, Ill.

Telephone VIllage 8-9400

LOS ANGELES

1000 N. Seward St., Los Angeles 38, Calif.

Telephone HOllywood 9-6201

SAN FRANCISCO

1182 Los Altos Ave., Los Altos, Calif.

Telephone WHitecliff 8-8233

CANADA

99 Floral Pkwy., Toronto 15, O

Telephone CHerry 6-2171

REPAIR SERVICES

EAST COAST

General Radio Company

Service Department

22 Baker Ave., W. Concord, Mass.

Telephone EMerson 9-4400

MIDWEST

General Radio Company

Service Department

6605 West North Ave., Oak Park, Ill.

Telephone VIllage 8-9400

WEST COAST

Western Instrument Co.

826 N. Victory Blvd., Burbank, Calif.

Telephone VIctoria 9-3013

CANADA

Bayly Engineering, Ltd.

Street, Ajax, Ontario

one Toronto EMpire 8-6866

MP MASTER

MA33095

Printed in USA